


CerAnode Cable Specification

Kynar®/HMWPE

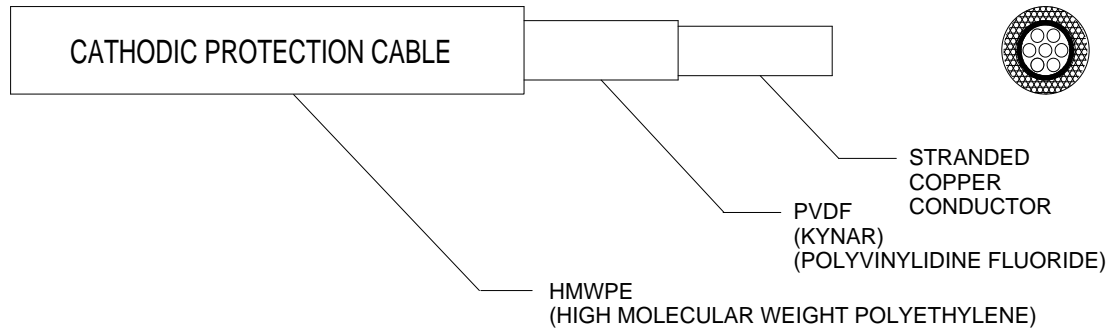

Kynar/HMWPE is a recommended anode lead wire cable choice for chloride and other harsh environments. Kynar is the trade name for polyvinylidene fluoride (PVDF). Since the electrochemical reaction at the anode in the presence of chlorides results in free chlorine gas generation causing rapid deterioration of most cable insulation, Kynar®/HMWPE cable is preferred for use in harsh corrosive environments such as deep anode beds and other environments where chlorides and other harsh chemicals are present. It is also a good choice for oil environments and applications operating at elevated temperatures up to 110°C (230°F). It is the Kynar insulation that provides resistance to these environments. The HMWPE jacket is designed to provide mechanical protection for the Kynar during installation. The HMWPE jacket is not expected to survive these environments over extended periods.

Sizes Available

AWG Size (mm ²)	COPPER CONDUCTOR Size (Inches)	PVDF Wall (Inches)	HMWPE Jacket (Inches)	Cable OD (Inches)	Maximum Breaking Strength (Pounds)	Approx. Wt./Ft (Pounds)	Maximum DC Res. @ 20 C (Ohms/Ft)	Max. DC Current in Air & Water (Amps)
#8 (8.37)	0.146	0.020	0.065	0.316	525	0.083	0.000640	45
#8 (8.37)	0.146	0.040	0.065	0.356	832	0.093	0.000640	45
#6 (13.3)	0.184	0.020	0.065	0.354	1320	0.120	0.000403	65
#6 (13.3)	0.184	0.040	0.065	0.394	1320	0.140	0.000403	65
#4 (21.2)	0.232	0.020	0.065	0.402	1670	0.175	0.000254	85
#4 (21.2)	0.232	0.040	0.065	0.442	1670	0.200	0.000254	85
#2 (33.6)	0.292	0.020	0.065	0.466	2110	0.265	0.000159	115
#2 (33.6)	0.292	0.040	0.065	0.466	2110	0.295	0.000159	115

Kynar® is an Arkema, Inc. Registered Trademark.